


KDPL20HTC200F – 1080P Dome Fixed IR Camera



Features

- 1/2.9" 2.1 Megapixel CMOS Sensor
- 1080P HD 4 In 1 output
- 300m cable distance by RG6
- Fixed 3.6mm board Lens
- UTC Camera OSD Control
- DNR, WDR
- TDN (True Day & Night) or Filter Change
- 18pcs x14 Miu IR LED
- 0 Lux up to 20m
- Wall/Ceiling Mount
- Cable-through bracket

DIMENSION

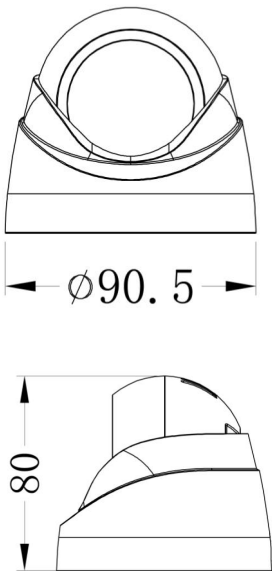

SPECIFICATION

Model	KDPL20HTC200F
Image Sensor	1/2.9" 2.1 Megapixel CMOS Sensor
Resolution	1920x1080 Pixels
Shuttle	1/25s ~ 1/50,000s
Lens	Fixed 3.6mm
Video Output	1080P@25fps
Day & Night	Filter Change or True Day&Night (TDN)
Minimum Illumination	0 Lux up to 20m
LEDs	18pcs x14 Miu
S/N Ratio	>52 DB
Casing	Plastic housing
Working Environment	(-20o ~ +60oC, Non-Condensing)
Power	12VDC, Max. 400mA
Dimension (mm)	Size: 90.2 x 80(H) mm ,300g
CERTIFICATION	CE,FCC,RoHS
Waterproof	NA